

## ENERGIZER 675 size - Mercury Free


**ZnAir**



(top view) (bottom view)

### Industry Standard Dimensions

mm (inches)

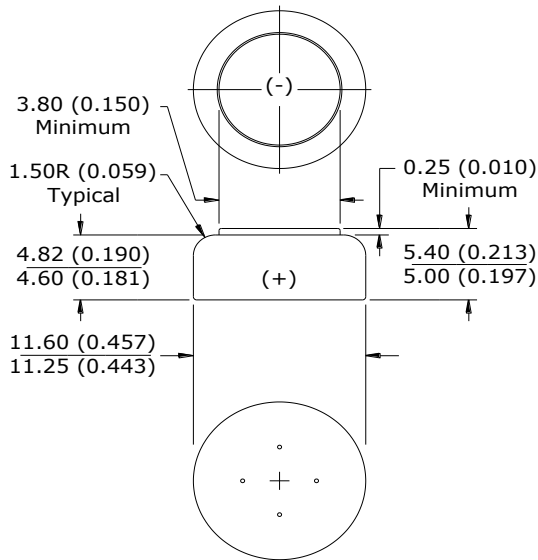


### Specifications

Chemical System:	Zinc Air (Zn/O <sub>2</sub> )
Tab Color:	Blue
Designation:	ANSI-7003ZD, IEC-PR44
Nominal Voltage:	1.4 Volts
Typical Capacity:	620 mAh (to 0.9 volts) (Rated at 625 ohms at 21°C/50% RH)
Typical Weight:	1.9 grams (0.1 oz.)
Typical Volume:	0.5 cubic centimeters (0.03 cubic inch)


### Typical Discharge Characteristics

IEC Industry Standards / Standard Test Protocol  
(15/5 mA .1S/1H59M 59.9S 12H at 21C)

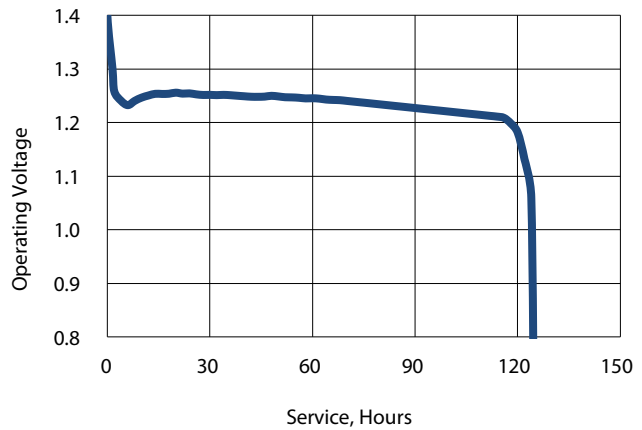


### Typical Discharge Characteristics

ANSI/IEC Industry Standards / Intermittent Test Protocol  
(620 ohm 12 hours per day at 21C)

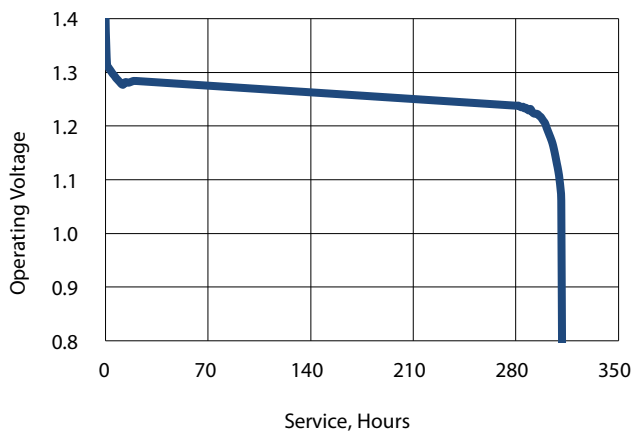

### Typical Discharge Characteristics

IEC Industry Standards / High Drain Test Protocol  
(24/8 mA .1S/1H59M 59.9S 12H at 21C)

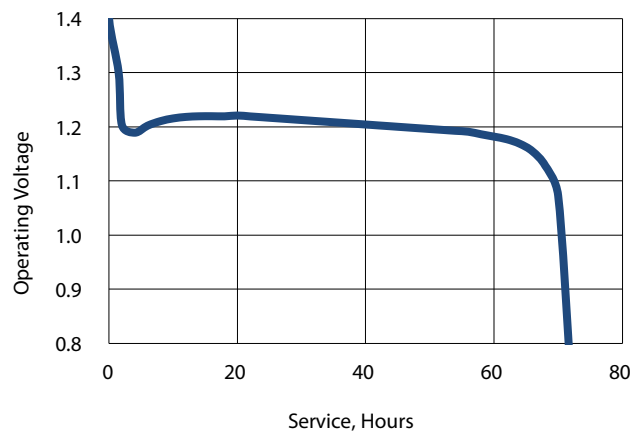

### Important Notice

This data sheet contains typical information specific to products manufactured at the time of its publication.  
©Energizer Holdings, Inc. - Contents herein do not constitute a warranty.